



C-LOGIC_515-PC

Interruptor crepuscular de pared
Wall mounted twilight switch



INSTALACIÓN/INSTALLATION



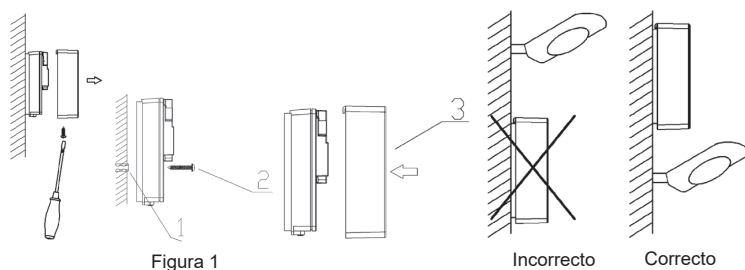


DIAGRAMA DE CABLEADO/CONNECTION-WIRE DIAGRAM

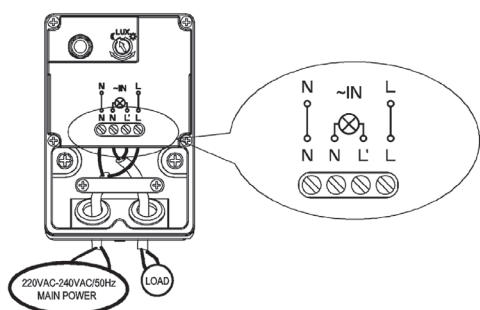

TEST



El detector crepuscular puede encender o apagar la luz automáticamente en función de la luz ambiental. La temperatura y humedad ambiental no afectan su funcionamiento. No es sólo conveniente, sino también práctico ya que puede controlar la iluminación sólo por la noche. Se utiliza para la iluminación de carreteras, luces de jardín, etc.



ESPECIFICACIONES

- Alimentación: 220-240V~
- Frecuencia: 50/60Hz
- Corriente nominal: 15A
- Ajuste Lux: <2-100LUX (ajustable)
- Temperatura de funcionamiento: -20~+40°C
- Humedad de funcionamiento: <93%RH
- Grado de protección IP 44



INSTALACIÓN

- Desconecte la alimentación.
- Extraiga el tornillo de la parte inferior y quite la tapa (ver Figura 1).
- Ubique el detector en la posición de instalación deseada y fíjelo con los tornillos.
- Reinstale de nuevo la tapa, conecte la alimentación y pruebe su funcionamiento.

TEST

- Gire el interruptor LUX en sentido antihorario a la posición luna y conecte la alimentación.
- Cuando se prueba durante el día, se debe cubrir el detector con una tela opaca.
- Cuando el detector está cubierto con la tela opaca, pero éste detecta una luz ambiental inferior a 2 luxes, la lámpara estará encendida.
- Cuando se retire la tela, la lámpara se apagará automáticamente.
- Al deslizar el interruptor LUX a la posición sol, la lámpara estará encendida si hay un nivel de luz ambiental menor de 100 luxes.

NOTAS

- En frente del detector no debe haber ningún obstáculo que afecte a la cantidad de luz natural que recibe.
- En frente del detector, no debe haber ningún objeto balanceándose.
- No instale el detector bajo la luz o en lugares donde la luz pueda ser enfocada hacia el detector.



The twilight detector can automatically switch the light on or off depending on the ambient light. The ambient temperature and humidity do not affect its operation. This is not only convenient, but also practical as you can control the lighting only at night. It is used for road lighting, garden lighting, etc.

SPECIFICATION

- Power source: 220-240V~
- Power frequency: 50/60Hz
- Rated current: 15A
- Ambient light: <2-100LUX (adjustable)
- Working temperature: -20~+40°C
- Working humidity: <93%RH
- IP 44 Protection degree



INSTALLATION

- Disconnect the power.
- Remove the screw at the bottom and remove the cover (see Figure 1).
- Place the detector in the desired installation position and secure it with the screws.
- Reinstall the cover, turn on the power and test the operation.

TEST

- Turn the LUX switch counterclockwise to the moon position and switch on the power.
- When testing during the day, the detector should be covered with an opaque cloth.
- When the detector is covered with the opaque cloth, but it detects ambient light below 2 lux, the lamp will be on.
- When the fabric is removed, the lamp will automatically turn off.
- By sliding the LUX switch to the sun position, the lamp will be on if there is an ambient light level of less than 100 lux.

NOTAS

- In front of the detector, there should be no obstacles affecting the amount of natural light it receives.
- In front of the detector, there should be no objects swaying.
- Do not install the detector under light or in places where light can be focused on the detector.

